




CARRIER SPECIFICATIONS

MST-300VD/L

Engine
Make: Kubota
Model: V2203
4-cycle
Inline
Direct injection
4 cylinders
Displacement: 2.2 litre
46 hp @ 2,800 rpm
Max. torque: 32.4 ft. lbs.
Fuel tank capacity: 13.7 gal.

Dimensions	
Vehicle wt: 5,000 lbs.	Overall length: 11' 8"
Overall width: 5' 3"	Max ht: 7' 9" with canopy
Max. loading capacity: 5,000 lbs.	
Width of tracks: 14 in.	
Height above ground: 24" frame	
Distance from back of cab to end of frame: 7' 8"	
Min. ground clearance: 11 in.	

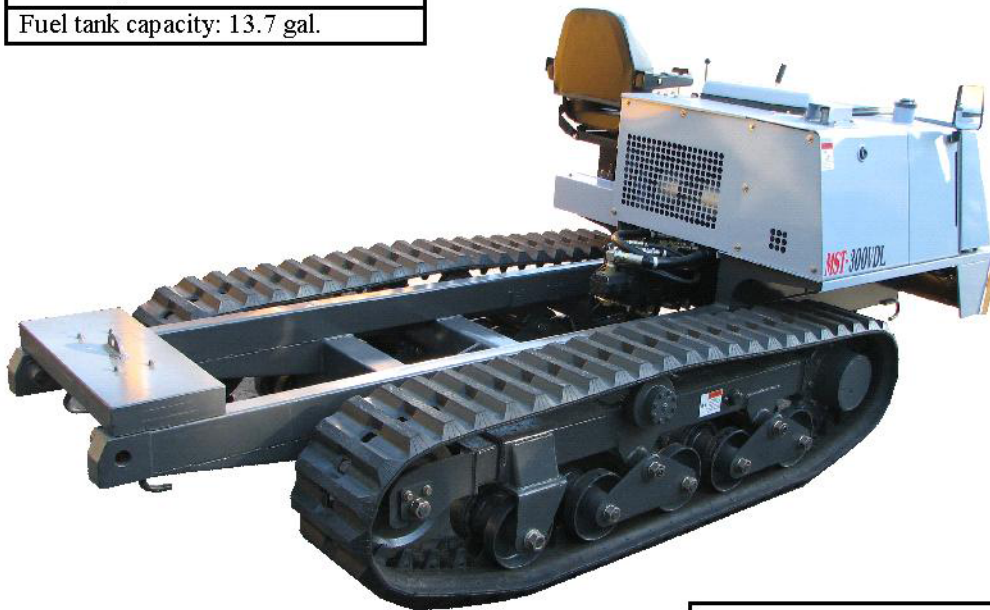

Performance
Slope climbing ability: 30 deg. unloaded
Ground pressure (empty): 2.28 psi
Ground pressure (loaded): 4.55 psi
Min. turn radius: 5.9'
Stage 1 max. speed: 3.73 mph
Stage 2 max. speed: 5.59 mph

Other Models; Quick Spec. Chart

Model	Weight	Load	Horsepower
MST 600VD	8,800 lbs.	7,260 lbs.	76 hp
MST 800VD	14,200 lbs.	9,482 lbs.	115 hp
MST1500VD	20,282 lbs.	13,892 lbs.	204 hp
MST2200VD	29,762 lbs.	22,050 lbs.	250 hp
LTX3500	42,000 lbs.	35,000 lbs.	475 hp

For more information, contact your local dealer: Equipment Direct, Inc. www.eqdirect.com
 Toll Free: 1-866-748-5195 Business: 1-907-696-5001 After Hours: 1-907-952-2740