




CARRIER SPECIFICATIONS

MST-300VD/L

Engine
Make: Kubota
Model: V2203
4-cycle
Inline
Direct injection
4 cylinders
Displacement: 2.2 litre
46 hp @ 2,800 rpm
Max. torque: 32.4 ft. lbs.
Fuel tank capacity: 13.7 gal.

Dimensions	
Vehicle wt: 5,000 lbs.	Overall length: 11' 8"
Overall width: 5' 3"	Max ht: 7' 9" with canopy
Max. loading capacity: 5,000 lbs.	
Width of tracks: 14 in.	
Height above ground: 24" frame	
Distance from back of cab to end of frame: 7' 8"	
Min. ground clearance: 11 in.	

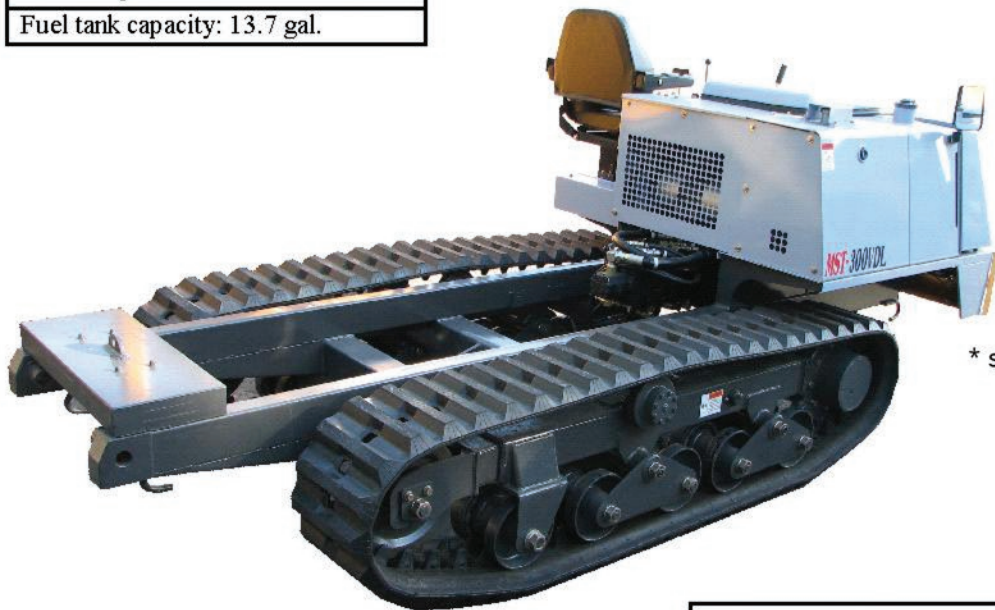

* shown without ROPS canopy

Performance
Slope climbing ability: 30 deg. unloaded
Ground pressure (empty): 2.28 psi
Ground pressure (loaded): 4.55 psi
Min. turn radius: 5.9'
Stage 1 max. speed: 3.73 mph
Stage 2 max. speed: 5.59 mph

Other Models; Quick Spec. Chart

Model	Weight	Load	Horsepower
MST 600VD	8,800 lbs.	7,260 lbs.	76 hp
MST 800VD	14,200 lbs.	9,482 lbs.	115 hp / 129 hp
MST1500VD	20,282 lbs.	13,892 lbs.	204 hp / 225 hp
MST2200VD	29,762 lbs.	22,050 lbs.	250 hp